




Adafruit NFC/RFID on Raspberry Pi

Created by Kevin Townsend

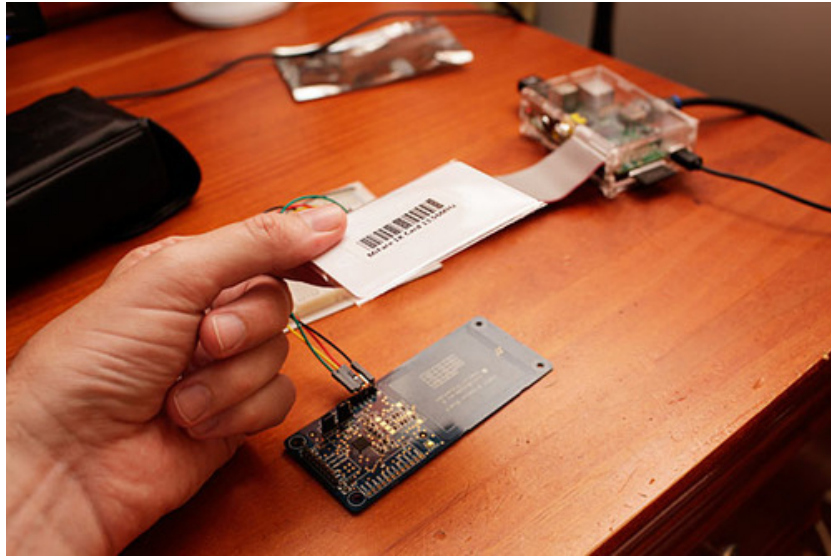

Last updated on 2014-12-18 12:00:19 PM EST

Guide Contents

Guide Contents	2
Overview	3
Freeing UART on the Pi	4
Step One: Run raspi-conf	4
Step Two: Disable UART	4
Step Three: Reset	4
Building libnfc	5
Step One: Download libnfc	5
Step Two: Setup libnfc for the Pi	5
Step Three: Run Config	7
Step Four: Build!	8
Testing it Out	11
Hooking Everything Up	11
Read an ISO14443-A (Mifare, etc.) Card with nfc-poll	12

Freeing UART on the Pi

The easiest way to use libnfc with the Adafruit NFC Breakout is via UART, since it's well-supported by libnfc out of the box. Unfortunately the UART port on the Pi is already dedicated to other purposes, and needs to be freed up for libnfc.

The following steps (based on a clean Raspbian install via noobs) should free UART up for us:

Step One: Run raspi-conf

From the command prompt enter the following command:

```
$ sudo raspi-config
```

Step Two: Disable UART

From the main menu, select **option 7 (Serial)**, then **select 'No'** to disable shell and kernel messages via UART.

Step Three: Reset

From the command prompt enter the following commands to reboot your Raspberry Pi board, freeing UART up in the process:

```
$ sudo reboot
```

Building libnfc

Step One: Download libnfc

Before you can do anything, you will need to get a copy of libnfc. Make sure you have an Ethernet cable connected to your Pi, and run the following commands to get libnfc 1.7.0

UPDATE 25 April 2014: Google has changed the way direct downloads work on Google Code. To manually download the archived source files, go to the following URL and select 'download .tar.gz': <https://code.google.com/p/libnfc/source/browse/?name=libnfc-1.7.0>

```
$ cd /home/pi
$ mkdir libnfc
$ cd libnfc
$ wget https://libnfc.googlecode.com/archive/libnfc-1.7.0.tar.gz
$ tar -xvzf libnfc-1.7.0.tar.gz
```

You should see something similar to the following:

```
pi@raspberrypi ~ $ mkdir libnfc
pi@raspberrypi ~ $ cd libnfc
pi@raspberrypi ~/libnfc $ wget http://libnfc.googlecode.com/files/libnfc-1.7.0-rc7.tar.gz
--2013-06-17 14:42:06-- http://libnfc.googlecode.com/files/libnfc-1.7.0-rc7.tar.gz
Resolving libnfc.googlecode.com (libnfc.googlecode.com)... 173.194.66.82, 2a00:1450:400c:c0
3::52
Connecting to libnfc.googlecode.com (libnfc.googlecode.com)|173.194.66.82|:80... connected.
HTTP request sent, awaiting response... 200 OK
Length: 608357 (594K) [application/x-gzip]
Saving to: `libnfc-1.7.0-rc7.tar.gz'

100%[=====] 608,357 595K/s in 1.0s
2013-06-17 14:42:08 (595 KB/s) - `libnfc-1.7.0-rc7.tar.gz' saved [608357/608357]
```

Step Two: Setup libnfc for the Pi

Before libnfc can be built, it needs to be configured for the target system and based on some parameters specific the NFC device you have connected.

libnfc 1.7.0 and later use a new config file, which needs to be placed at a specific location. Thankfully, libnfc 1.7.0 includes a config file for the Raspberry Pi, which you can copy to the right destination with the following commands:

```
$ cd libnfc-libnfc-1.7.0
$ sudo mkdir /etc/nfc
```


```
$ sudo mkdir /etc/nfc/devices.d  
$ sudo cp contrib/libnfc/pn532_uart_on_rpi.conf.sample /etc/nfc/devices.d/pn532_uart_on_rpi.conf
```

Next, we need to make a small change to this file, which we can do by entering:

```
sudo nano /etc/nfc/devices.d/pn532_uart_on_rpi.conf
```

Update the file to include the following line at the bottom:

```
allow_intrusive_scan = true
```

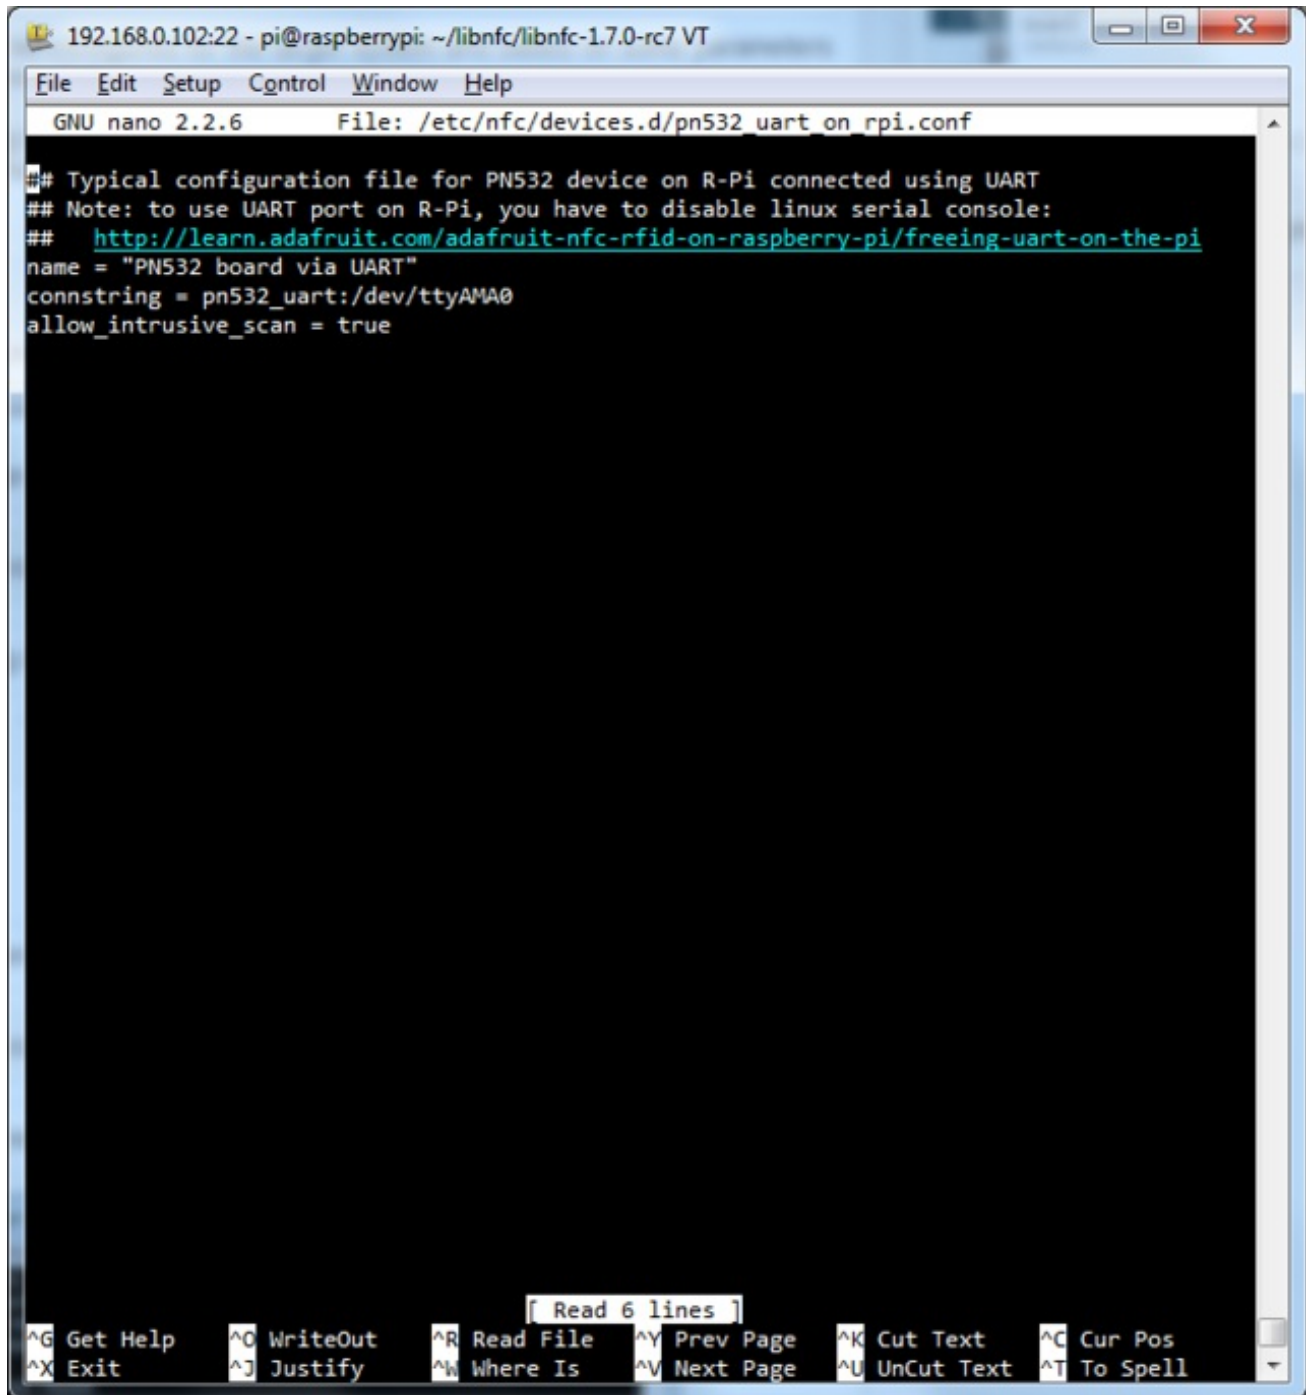

```
192.168.0.102:22 - pi@raspberrypi: ~/libnfc/libnfc-1.7.0-rc7 VT
File Edit Setup Control Window Help
GNU nano 2.2.6 File: /etc/nfc/devices.d/pn532_uart_on_rpi.conf
# Typical configuration file for PN532 device on R-Pi connected using UART
## Note: to use UART port on R-Pi, you have to disable linux serial console:
## http://learn.adafruit.com/adafruit-nfc-rfid-on-raspberry-pi/freeing-uart-on-the-pi
name = "PN532 board via UART"
connstring = pn532_uart:/dev/ttyAMA0
allow_intrusive_scan = true

[ Read 6 lines ]
^G Get Help      ^O WriteOut     ^R Read File    ^Y Prev Page    ^K Cut Text      ^C Cur Pos
^X Exit          ^J Justify      ^W Where Is     ^V Next Page    ^U UnCut Text   ^T To Spell
```

Press CTRL+O then enter to save the file, and then CTRL+X to quite nano.

Step Three: Run Config


The next step is to configure the project itself using the 'configure' tool, as follows:

```
$ sudo apt-get install autoconf
$ sudo apt-get install libtool
$ sudo apt-get install libpcsc-lite-dev libusb-dev
```



```
$ autoreconf -vis
$ ./configure --with-drivers=pn532_uart --sysconfdir=/etc --prefix=/usr
```

This should give you the following screen once the configuration process is complete (it takes a few minute though):

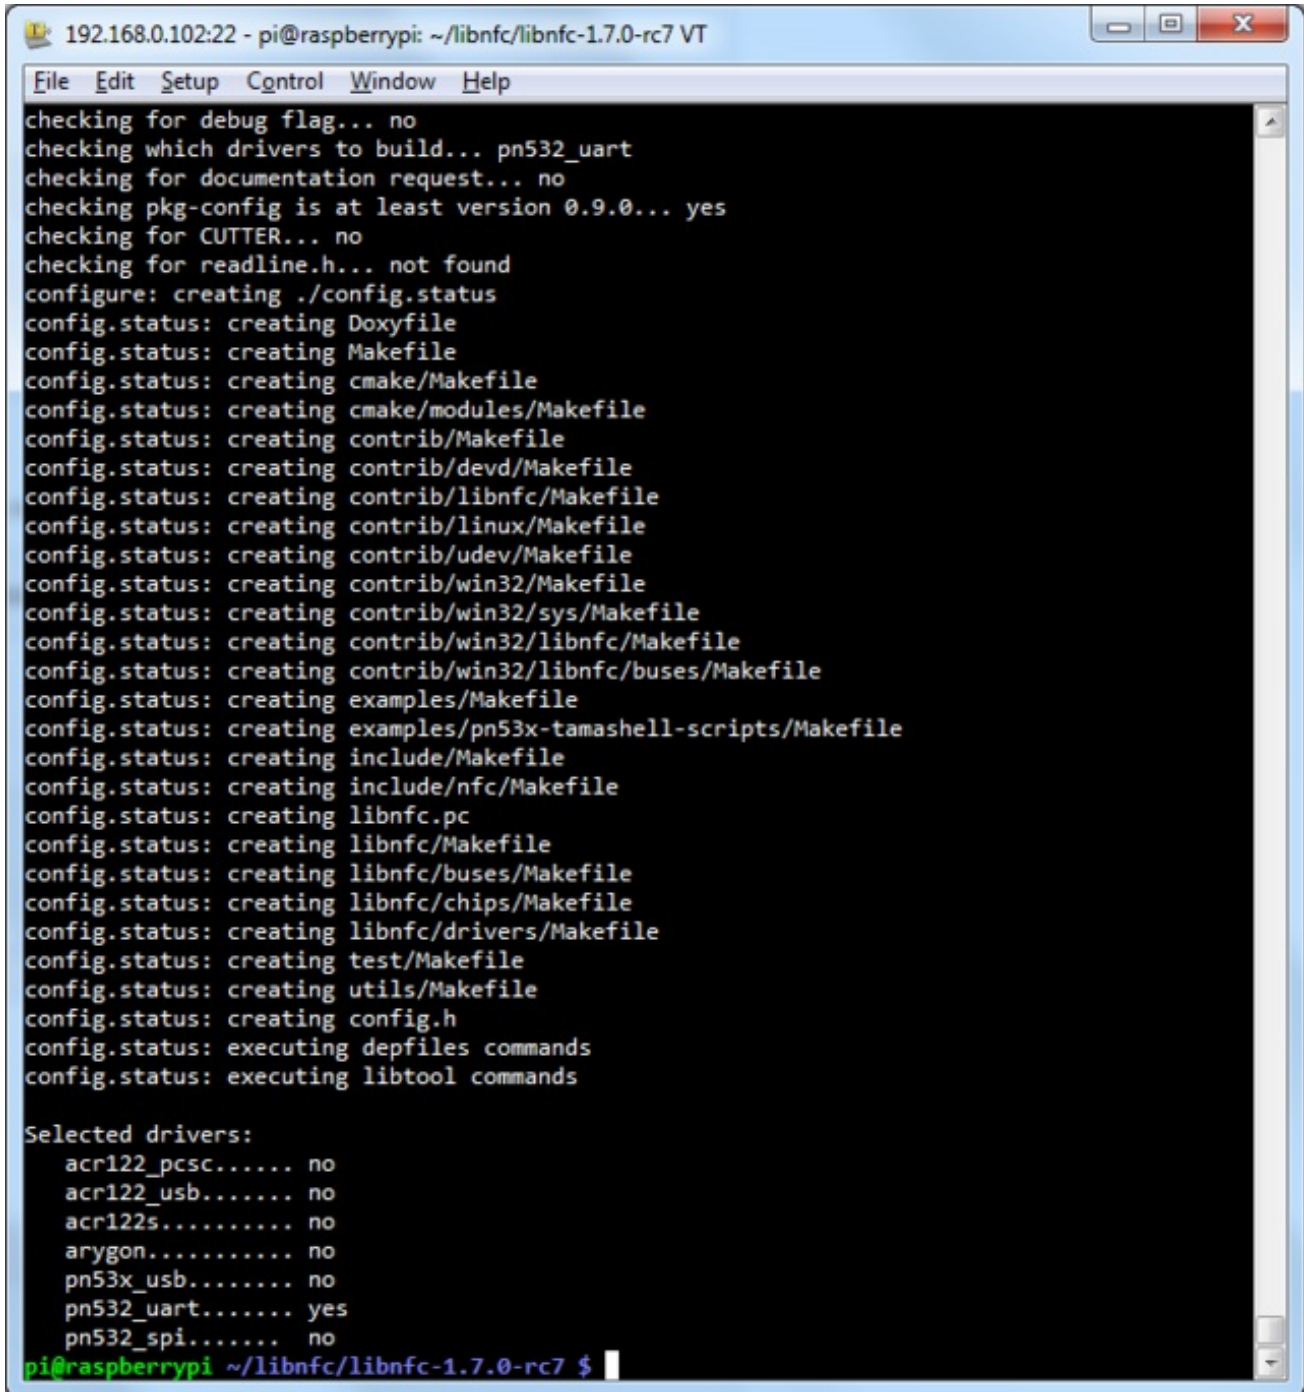

```
192.168.0.102:22 - pi@raspberrypi: ~/libnfc/libnfc-1.7.0-rc7 VT
File Edit Setup Control Window Help
checking for debug flag... no
checking which drivers to build... pn532_uart
checking for documentation request... no
checking pkg-config is at least version 0.9.0... yes
checking for CUTTER... no
checking for readline.h... not found
configure: creating ./config.status
config.status: creating Doxyfile
config.status: creating Makefile
config.status: creating cmake/Makefile
config.status: creating cmake/modules/Makefile
config.status: creating contrib/Makefile
config.status: creating contrib/devd/Makefile
config.status: creating contrib/libnfc/Makefile
config.status: creating contrib/linux/Makefile
config.status: creating contrib/udev/Makefile
config.status: creating contrib/win32/Makefile
config.status: creating contrib/win32/sys/Makefile
config.status: creating contrib/win32/libnfc/Makefile
config.status: creating contrib/win32/libnfc/buses/Makefile
config.status: creating examples/Makefile
config.status: creating examples/pn53x-tamashell-scripts/Makefile
config.status: creating include/Makefile
config.status: creating include/nfc/Makefile
config.status: creating libnfc.pc
config.status: creating libnfc/Makefile
config.status: creating libnfc/buses/Makefile
config.status: creating libnfc/chips/Makefile
config.status: creating libnfc/drivers/Makefile
config.status: creating test/Makefile
config.status: creating utils/Makefile
config.status: creating config.h
config.status: executing depfiles commands
config.status: executing libtool commands


Selected drivers:
acr122_pcsc..... no
acr122_usb..... no
acr122s..... no
arygon..... no
pn53x_usb..... no
pn532_uart..... yes
pn532_spi..... no
pi@raspberrypi ~/libnfc/libnfc-1.7.0-rc7 $
```

Step Four: Build!

To build libnfc, you simply need to enter the following commands:


```
$ sudo make clean
$ sudo make install all
```

Which should start the (slowish!) build process as follows:

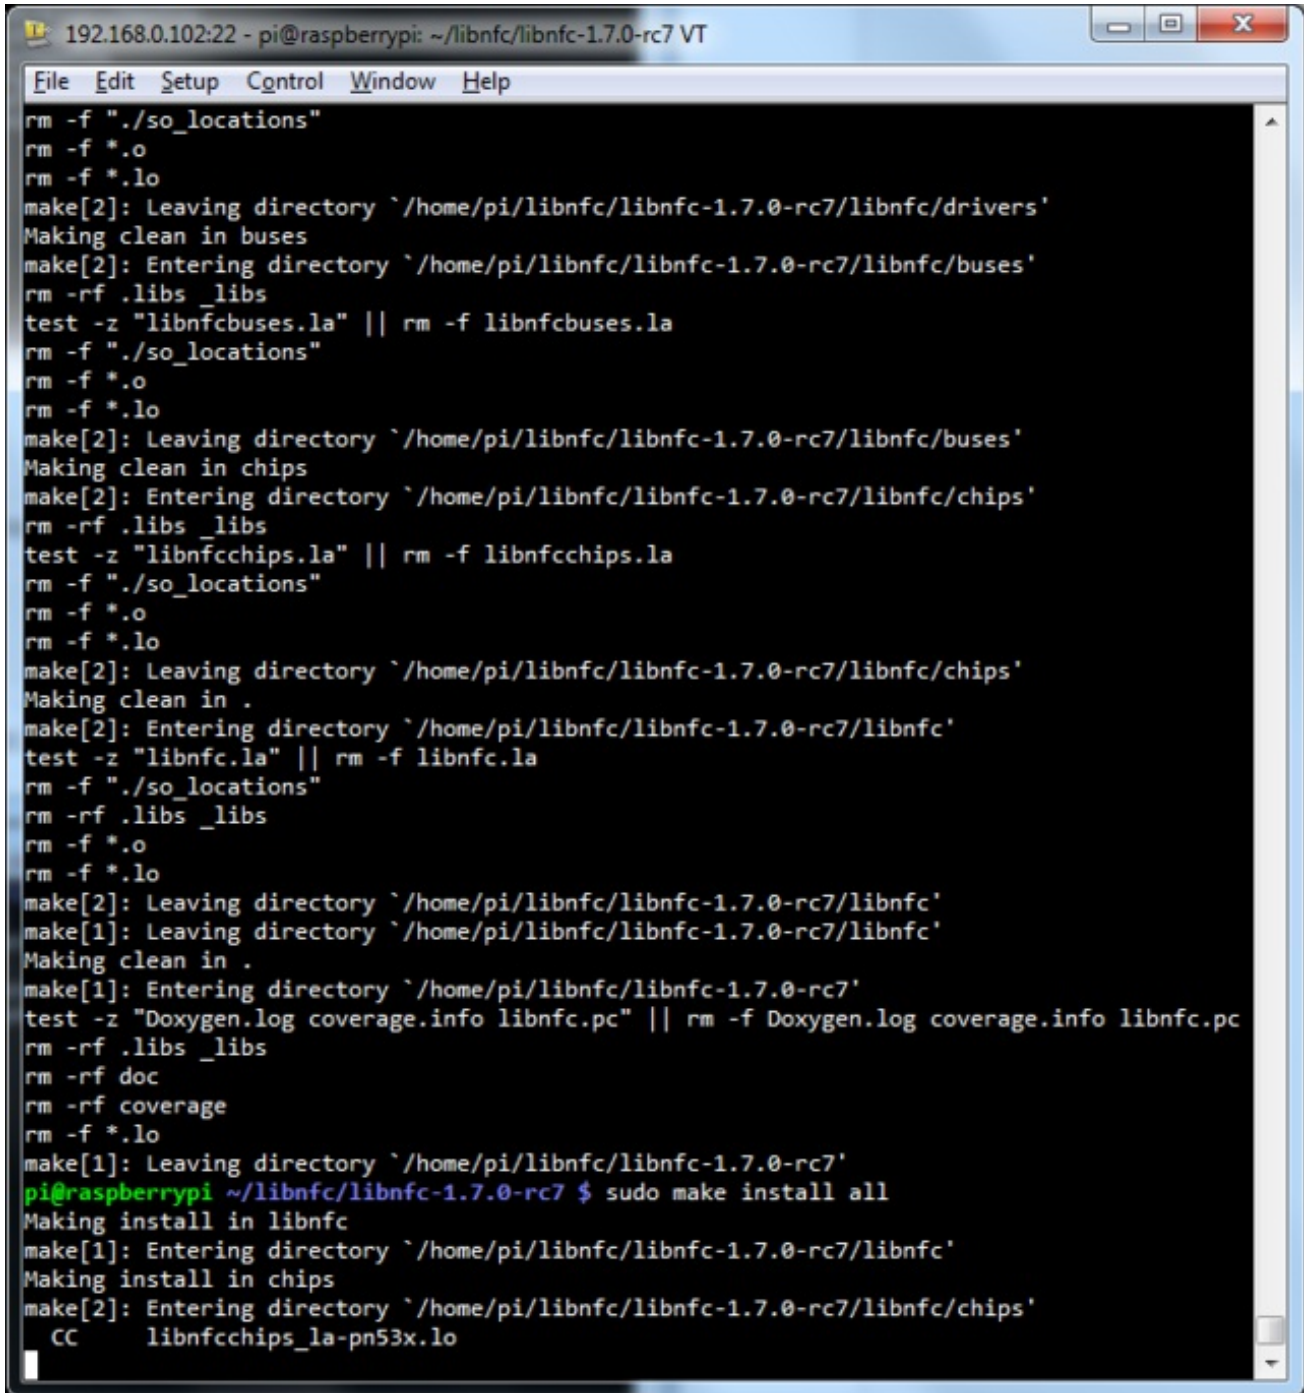

```
192.168.0.102:22 - pi@raspberrypi: ~/libnfc/libnfc-1.7.0-rc7 VT
File Edit Setup Control Window Help
rm -f "./so_locations"
rm -f *.o
rm -f *.lo
make[2]: Leaving directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc/drivers'
Making clean in buses
make[2]: Entering directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc/buses'
rm -rf .libs _libs
test -z "libnfcbuses.la" || rm -f libnfcbuses.la
rm -f "./so_locations"
rm -f *.o
rm -f *.lo
make[2]: Leaving directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc/buses'
Making clean in chips
make[2]: Entering directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc/chips'
rm -rf .libs _libs
test -z "libnfcchips.la" || rm -f libnfcchips.la
rm -f "./so_locations"
rm -f *.o
rm -f *.lo
make[2]: Leaving directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc/chips'
Making clean in .
make[2]: Entering directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc'
test -z "libnfc.la" || rm -f libnfc.la
rm -f "./so_locations"
rm -rf .libs _libs
rm -f *.o
rm -f *.lo
make[2]: Leaving directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc'
make[1]: Leaving directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc'
Making clean in .
make[1]: Entering directory `/home/pi/libnfc/libnfc-1.7.0-rc7'
test -z "Doxygen.log coverage.info libnfc.pc" || rm -f Doxygen.log coverage.info libnfc.pc
rm -rf .libs _libs
rm -rf doc
rm -rf coverage
rm -f *.lo
make[1]: Leaving directory `/home/pi/libnfc/libnfc-1.7.0-rc7'
pi@raspberrypi ~/libnfc/libnfc-1.7.0-rc7 $ sudo make install all
Making install in libnfc
make[1]: Entering directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc'
Making install in chips
make[2]: Entering directory `/home/pi/libnfc/libnfc-1.7.0-rc7/libnfc/chips'
CC      libnfcchips_la-pn53x.lo
```

Once the build process is complete, you're ready to go on to testing the library on actual HW ...

Note: Make sure that the **SEL0** and **SEL1** jumpers on the NFC breakout are set to **OFF**, which will cause the PN532 to boot into UART mode (rather than SPI and I2C, which aren't currently supported by libnfc). You will need to reset the breakout after changing these pins, which you can do by cycling the power pin.


Use the 5V supply on the Pi Cobbler, and the 5V input on the FTDI header rather than the 3.3V supply, since the 3.3V supply is used by the core on the raspberry Pi and you don't want to pull sharp, heavy loads from it, like when you first enable and charge the near field.

Read an ISO14443-A (Mifare, etc.) Card with nfc-poll

With libnfc built and properly configure, you can go back to the command-line, place a card on the reader, and run the following command to get the tags unique ID:

```
$ cd examples
$ sudo ./nfc-poll
```

Which should results in the following:

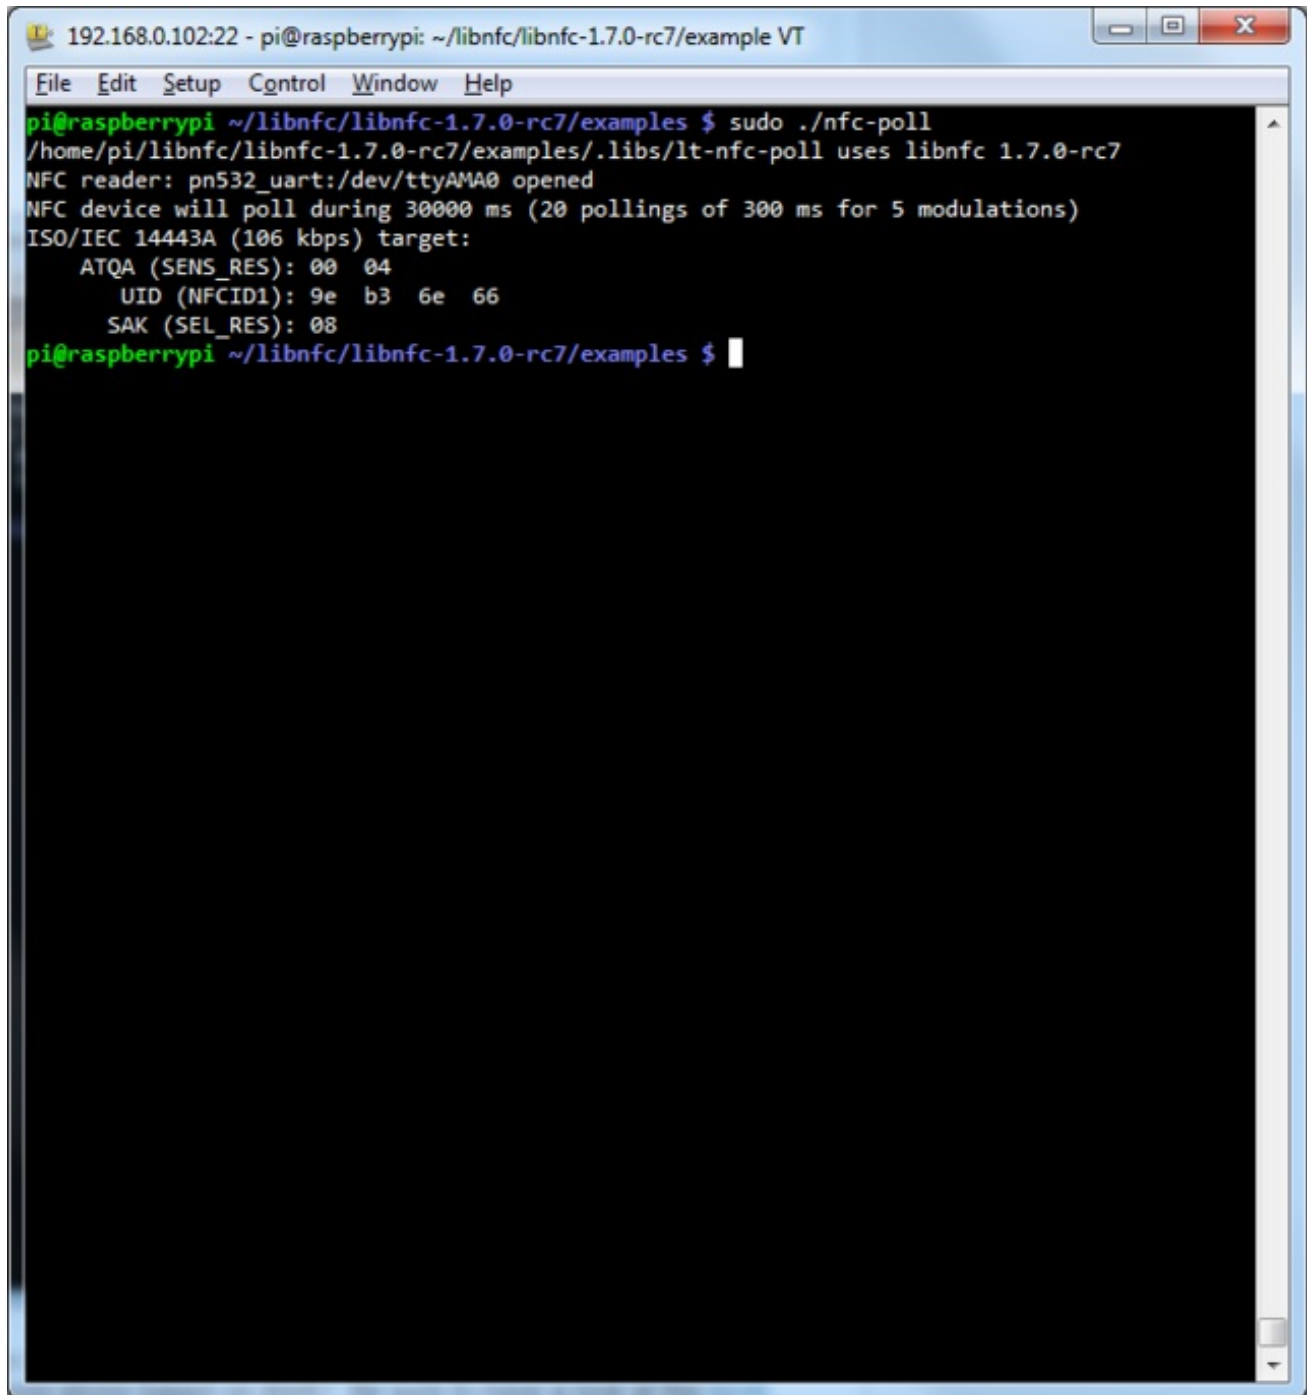

```
192.168.0.102:22 - pi@raspberrypi: ~/libnfc/libnfc-1.7.0-rc7/example VT
File Edit Setup Control Window Help
pi@raspberrypi ~/libnfc/libnfc-1.7.0-rc7/examples $ sudo ./nfc-poll
/home/pi/libnfc/libnfc-1.7.0-rc7/examples/.libs/lt-nfc-poll uses libnfc 1.7.0-rc7
NFC reader: pn532_uart:/dev/ttyAMA0 opened
NFC device will poll during 30000 ms (20 pollings of 300 ms for 5 modulations)
ISO/IEC 14443A (106 kbps) target:
  ATQA (SENS_RES): 00 04
  UID (NFCID1): 9e b3 6e 66
  SAK (SEL_RES): 08
pi@raspberrypi ~/libnfc/libnfc-1.7.0-rc7/examples $
```

That's it! From here, you can explore some of the other examples in the 'examples' folder, and figure out how to get started writing your own applications based on libnfc! Be sure to have a look at the [libnfc project page \(http://adafruit.it/aN3\)](http://adafruit.it/aN3) which also contains a useful and active forum.